


## 2 KUTUP / 3000 DEVİR MONOFAZE



MEKANİK BİLGİLER							ELEKTRİKSEL BİLGİLER						
RPM	MODEL	Santrifüj Kuvveti		Statik Moment	Ağırlık	Nominal Gerilim	Maks. Akım	Kapasitör	Maks. Giriş Gücü				
50 Hz		KG	N	kgmm	KG	V	A	$\mu$ F	kW				
<b>3000</b>	VA 2-80 M	80	785	8	6.2	230	0,3	6	0,1				
	VA 2-120 M	120	1177	12	6.6	230	0,35	8	0,1				
	VA 2-200 M	200	1962	20	7.0	230	1	6	0,15				
	VB 2-350 M	340	3335	34	10.2	230	1,5	8	0,16				
	VC 2-500 M	500	4905	50	14.5	230	1,1	8	0,17				
ÖLÇÜLER (mm)													
MODEL	A	B	C	D	E	$\emptyset$ Gx4	H	I	L	M	N	Kablo Girişi	Şekil No
VA 2-80 M	219	156	125	74-62	106	9	62	51.5	113	116	145	M20 x 1.5	1
VA 2-120 M	219	156	125	74-62	106	9	62	51.5	113	116	145	M20 x 1.5	1
VA 2-200 M	219	156	125	74-62	106	9	62	51.5	113	116	145	M20 x 1.5	1
VB 2-350 M	285	175	152	90	125	13	75	66.5	130	152	162	M20 x 1.5	1
VC 2-500 M	247	196	172	95	140	13	86	47.5	151	152	191	M20 x 1.5	1

Şekil 1

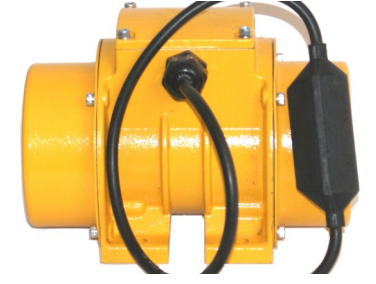